

MicroCAT C-T Recorder (Serial interface & Memory)

SBE 37-SM


The SBE 37-SM MicroCAT is a high-accuracy conductivity and temperature (pressure optional) recorder with internal battery and memory. Designed for moorings or other long duration, fixed-site deployments, the MicroCAT includes a standard serial interface and non-volatile FLASH memory. Constructed of titanium and other non-corroding materials to ensure long life with minimum maintenance, the MicroCAT's depth capability is 7000 meters; it is also available with an optional 250-meter plastic *ShallowCAT* housing.

Calibration coefficients are stored in EEPROM, and uploaded data is presented in ASCII engineering units. The data always includes Conductivity, Temperature, and Pressure (if optional pressure sensor is installed). If desired, time can be added to each scan, and the MicroCAT can calculate and output salinity and sound velocity (Chen-Millero). The MicroCAT retains the temperature and conductivity sensors used in our time-proven SEACAT products; however, new acquisition techniques provide increased accuracy and resolution while reducing power consumption. Electrical isolation of the conductivity electronics eliminates any possibility of ground-loop noise.

The MicroCAT's unique internal-field conductivity cell permits the use of expendable anti-foulant devices. The aged and pressure-protected thermistor has a long history of exceptional accuracy and stability.

The optional pressure sensor, developed by Druck, Inc., has a superior new design that is entirely different from conventional 'silicon' types in which the deflection of a metallic diaphragm is detected by epoxy-bonded silicon strain gauges. The Druck sensor employs a micro-machined *silicon diaphragm* into which the strain elements are implanted using semiconductor fabrication techniques. Unlike metal diaphragms, silicon's crystal structure is perfectly elastic, so the sensor is essentially free of pressure hysteresis. Compensation of the temperature influence on pressure offset and scale is performed by the MicroCAT's CPU.



SENSOR INTERFACE ELECTRONICS

Temperature is acquired by applying an AC excitation to a hermetically-sealed VISHAY reference resistor and an ultra-stable aged thermistor (drift rate typically less than 0.002 °C per year). The ratio of thermistor resistance to reference resistance is determined by a 24-bit A/D converter; this A/D also processes the pressure sensor signal. Conductivity is acquired using an ultra-precision Wien-Bridge oscillator. A high-stability reference crystal with a drift rate of less than 2 ppm/year is used to count the frequency from the oscillator.

COMMUNICATIONS AND INTERFACING

The MicroCAT communicates directly with a computer via standard RS-232 interface. Data can be uploaded at up to 38.4K baud. Real-time data can be transmitted at distances of up to 1600 meters (5200 feet) at 600 baud, simultaneously with recording. An optional RS-485 interface allows multiple MicroCATs to share a common 2-wire cable, minimizing cable complexity for C-T chains.

User-selectable operating modes include:

- **Autonomous Sampling** – At pre-programmed intervals of 5 seconds to 9.1 hours, the MicroCAT wakes up, samples, stores the data in its FLASH memory, and goes to sleep.
- **Polled Sampling** – On command from a computer or satellite, radio, or wire telemetry equipment, the MicroCAT takes a sample and transmits the data.
- **Serial Line Sync** – In response to a pulse on the serial line, the MicroCAT wakes up, samples, stores the data in its FLASH memory, transmits real-time data, and goes to sleep.

SOFTWARE

The MicroCAT is supplied with a powerful Windows 95/98/NT/2000/XP software package, SEASOFT®-Win32, which includes:

- SEATERM® – terminal program for easy communication and data retrieval.
- SBE Data Processing® – programs for calculation, display, and plotting of conductivity, temperature, pressure (optional), and derived variables such as salinity and sound velocity.



Sea-Bird Electronics, Inc.

1808 136th Place NE, Bellevue, Washington 98005 USA

Website: <http://www.seabird.com>

E-mail: seabird@seabird.com

Telephone: (425) 643-9866

Fax: (425) 643-9954

DATA STORAGE AND BATTERY ENDURANCE

Temperature and conductivity are stored 5 bytes/sample, time 4 bytes/sample, and optional pressure 2 bytes/sample; memory capacity is in excess of 185,000 samples. The MicroCAT is powered by a 7.2 Ampere-Hour (nominal) battery pack consisting of six 9-volt lithium batteries which, when removed from the MicroCAT, can be shipped without hazardous material restrictions. The pack provides sufficient internal battery capacity for more than 300,000 samples. *

SPECIFICATIONS

Measurement Range

Conductivity: 0 - 7 S/m (0 - 70 mS/cm)
 Temperature: -5 to 35 °C
 Optional Pressure: 20/100/350/600/1000/2000/3500/7000 (meters of deployment depth capability)

Initial Accuracy

Conductivity: 0.0003 S/m (0.003 mS/cm)
 Temperature: 0.002 °C
 Optional Pressure: 0.1% of full scale range

Typical Stability (per month)

Conductivity: 0.0003 S/m (0.003 mS/cm)
 Temperature: 0.0002 °C
 Optional Pressure: 0.004% of full scale range

Resolution

Conductivity: 0.00001 S/m (0.0001 mS/cm)
 Temperature: 0.0001 °C
 Optional Pressure: 0.002% of full scale range

Time Resolution 1 second

Clock Accuracy 13 seconds/month

Quiescent Current * 10 microamps

Sampling and Communication Current *

Without external power option

Communication 38 milliamps
 Sampling 20 milliamps for autonomous or serial line sync sampling;
 39 milliamps for polled sampling

With external power option

Communication 35 milliamps
 Sampling 35 milliamps

Acquisition Time


1 - 3 seconds/sample
 (for 1 measurement/sample),
 dependent on sampling mode
 and inclusion of pressure sensor

Optional External

Input Power 0.5 Amps at 9-24 VDC


Housing, Depth Rating, and Weight (without pressure se

Standard Titanium, 7000 m (23,000 ft)
 Weight in air: 3.8 kg (8.3 lbs)
 Weight in water: 2.3 kg (5.1 lbs)
 Optional ShallowCAT Plastic, 250 m (820 ft)
 Weight in air: 2.7 kg (6.0 lbs)
 Weight in water: 1.2 kg (2.7 lbs)

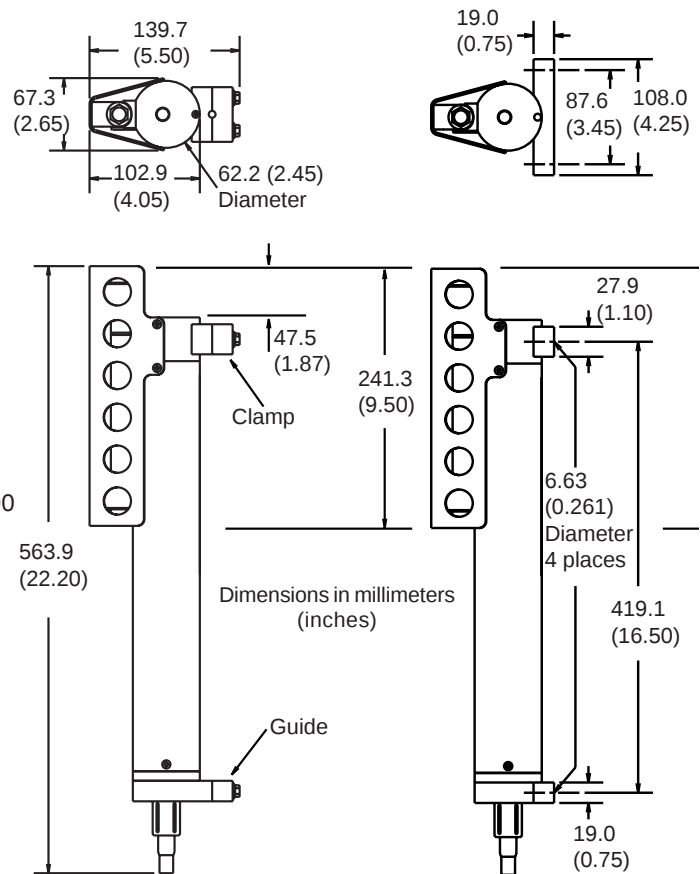

Standard Wire Mounting
Clamp and Guide

Alternate Flat Surface
Mounting Brackets

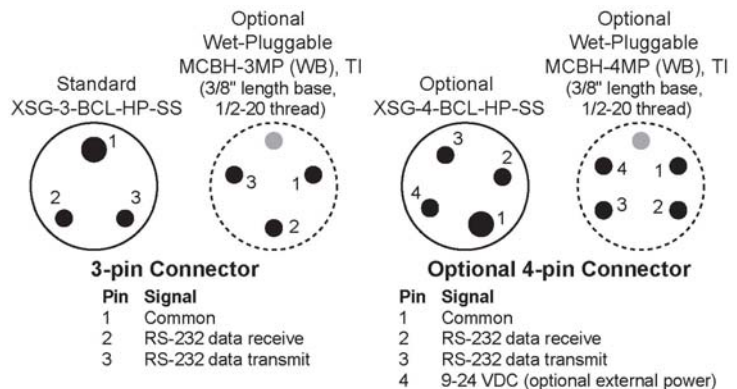

* Power consumption / battery endurance values are for standard RS-232 interface; for optional RS-485 interface, see RS-485 manual

11/06